

IRON-REMOVE FOR LIQUIDS






DEMOVER 250-400-800

TECHNICAL FEATURES

DATA	U.M.	250	400	800
Nominal power of magnets	Gauss	12,000	12,000	12,000
Power	kW	0,18+0,12	0,18+0,12	0,55+0,12
Washing water consumption	l/s	0.1	0.15	0.15
Weight	kg	260	335	625
Maximum Capacity	l/h	12,000	18,000	36,000

STRUCTURAL FEATURES

- Automatic programmable cleaning
- Rollers with permanent magnets
- All parts in contact with AISI 304 stainless steel
- Gearmotors with life-long lubrication
- AISI 304 stainless steel accident-prevention protections

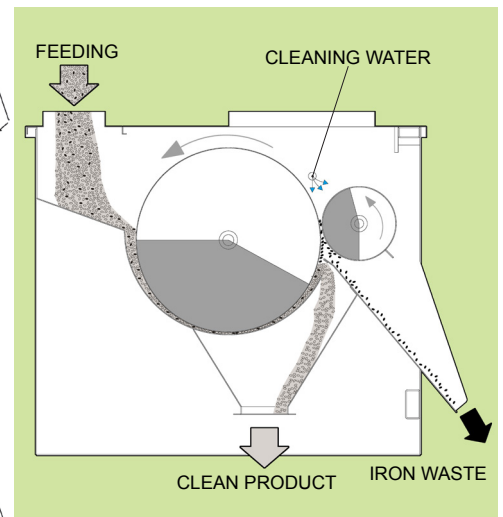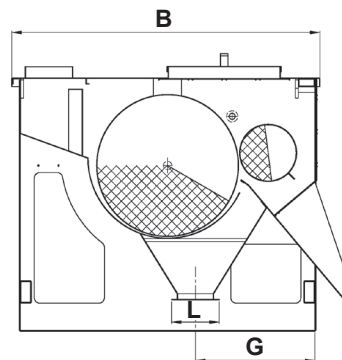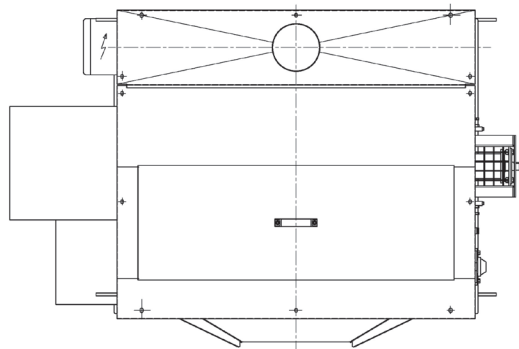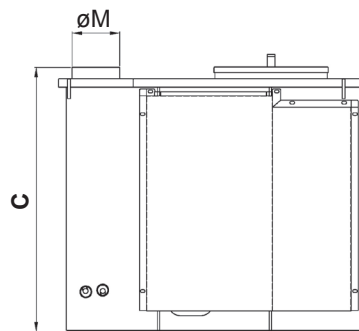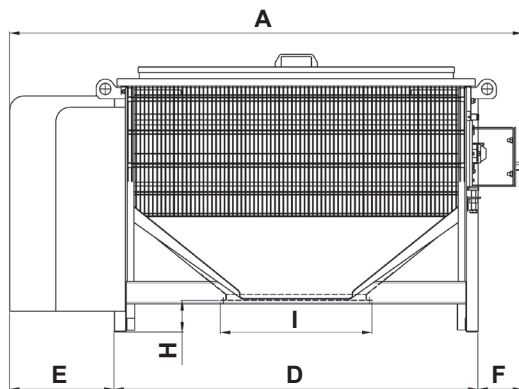

Mod./Size	A	B	C	D	E	F	G	H	I	L	øM
250	1356	793	661	896	310	150	272	12	290	170	170
400	1756	793	661	1296	310	150	272	12	540	170	170
800	1828	1098	942	1296	372	160	426	112	540	170	170

USE

- Casting slip deferrization
- Grinding water deferrization

ADVANTAGES

- Constant efficiency, ensured by fully automatic cleaning
- Permanent magnets to ensure operation under any condition
- High capacities with reduced overall dimensions

The information is approximate - The guaranteed values are released by Vibrotech s.r.l. on request-It is forbidden to reproduce the document even partially.