GRAVITY TYPE ELECTROMAGNETIC IRON SEPARATOR FOR LIQUIDS


FG 142-205-245-300-350-400

TECHNICAL FEATURES							
DATA	**U.M.**	**142**	**205**	**245**	**300**	**350**	**400**
Power	kW	0.22	0.30	0.40	0.60	0.80	1.00
Max. Capacity	dm³/h	2.500	6.000	12,000	16.000	24.000	34.000
Weight	N	687	932	1,619	2.845	4.317	6.083





STRUCTURAL FEATURES

- IP54 rating electric control panel.
- MAGNETIC STAINLESS STEEL reinforced grids.
- Electric coil powered with direct current.
- Supply tank with float.

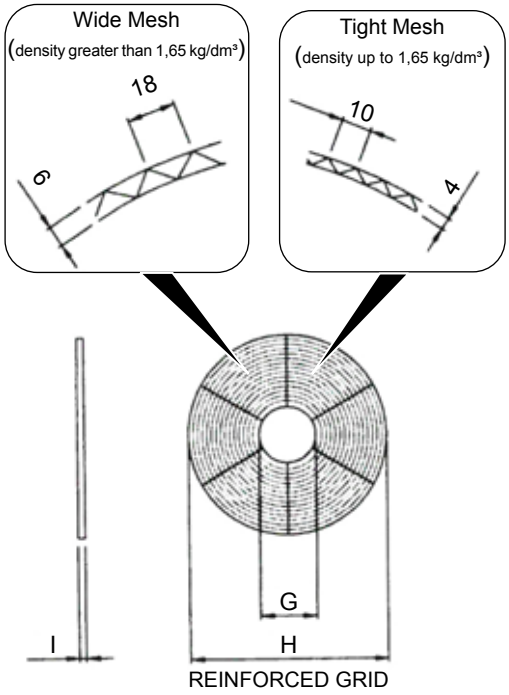

REINFORCED GRID

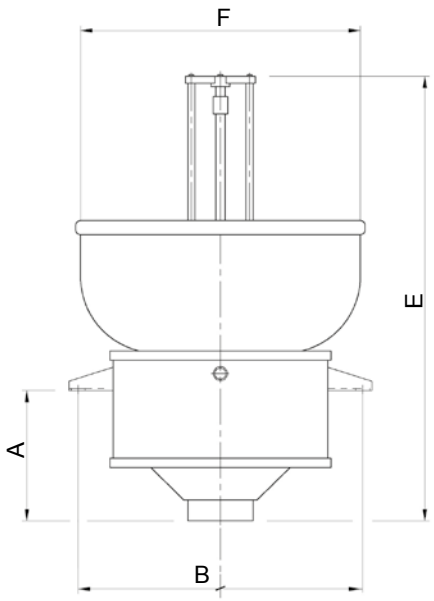

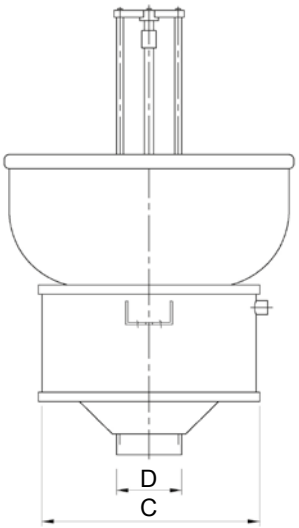

Mod./Size	A	øB	øC	D	E	F	øG	øH	I	N° GRIDS
142	/	/	330	1”1/2	675	380	46	142	6	23
205	225	465	375	2”1/2	825	450	85	203	6	25
245	245	610	460	4”	940	575	95	242	6	28
300	260	650	520	5”	1.000	575	138	300	6	28
350	300	670	565	6”	1.100	610	138	345	10	28
400	380	755	640	6”	1.500	730	140	400	10	27

USE

- Iron removal from water, slips and glazes used in ceramics.

ADVANTAGES

- Easy cleaning by disengaging the magnetic field.

The information is approximate - The guaranteed values are released by Vibrotech s.r.l. on request-It is forbidden to reproduce the document even partially.

VIBROTECH S.r.l.
Registered Office: Via Racchetta, 2 - int. 20 - 41049 Sassuolo (MO)
Operational Headquarters: Via Don Pasquino Borghi, 4 - 42013 S. ANTONINO DI CASALGRANDE (RE) - Italy
Tel. +39 0536 82.37.76 - Fax +39 0536 81.20.09 - www.vibrotech.biz - email: info@vibrotech.biz
R.E.A. of Mo no. 407988 - Tax Code and VAT no. 03674210368

VIBROTECH™