GRAVITY TYPE ELECTROMAGNETIC IRON SEPARATOR FOR LIQUIDS


FG 205-245 PLUS

TECHNICAL FEATURES			
DATA	**U.M.**	**205**	**245**
Power	kW	0.65	1.00
Max. Capacity	dm³/h	9.000	12,000
Weight	N	1510	2549




STRUCTURAL FEATURES

- Corrosion-proof galvanised structure.
- IP54 rating electric control panel.
- MAGNETIC STAINLESS STEEL reinforced grids.
- Enhanced electric coil powered with direct current.
- Supply tank with float.

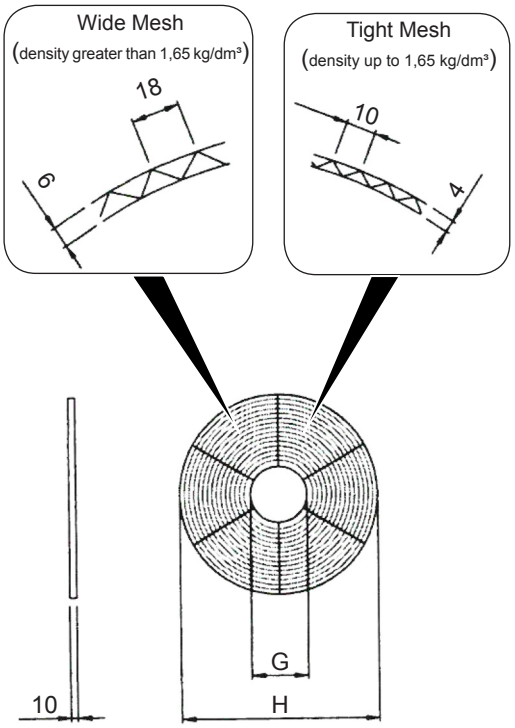

REINFORCED GRID

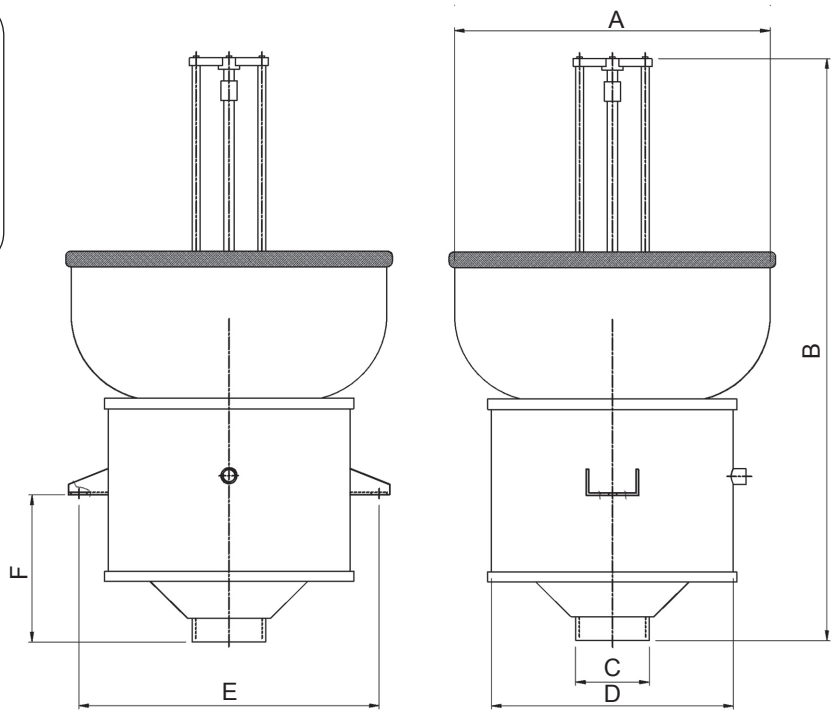

Mod./Size	øA	B	C	øD	E	F	øG	øH	N° GRIDS
205	460	800	2-1/2”	375	465	265	86	203	24
245	580	900	4”	520	610	320	100	242	26

USE

- Plants for ceramic slips and glazes.

ADVANTAGES

- Increased magnetic power.
- Easy cleaning by disengaging the magnetic field.
- Extra thick grids.
- Longer filter area.

The information is approximate - The guaranteed values are released by Vibrotech s.r.l. on request-It is forbidden to reproduce the document even partially.

VIBROTECH S.r.l.
Registered Office: Via Racchetta, 2 - int. 20 - 41049 Sassuolo (MO)
Operational Headquarters: Via Don Pasquino Borghi, 4 - 42013 S. ANTONINO DI CASALGRANDE (RE) - Italy
Tel. +39 0536 82.37.76 - Fax +39 0536 81.20.09 - www.vibrotech.biz - email: info@vibrotech.biz
R.E.A. of Mo no. 407988 - Tax Code and VAT no. 03674210368

VIBROTECH™