PRESSURE TYPE ELECTROMAGNETIC IRON SEPARATOR FOR LIQUIDS


FP 205-245 PLUS

TECHNICAL FEATURES			
DATA	**U.M.**	**205**	**245**
Power	kW	0.65	1.00
Max. Capacity	dm³/h	9000	12000
Max operating pressure	bar	10	8
Weight	N	1766	2354





STRUCTURAL FEATURES

- Corrosion-proof galvanised structure.
- IP54 rating electric control panel.
- MAGNETIC STAINLESS STEEL reinforced grids.
- Enhanced electric coil powered with direct current.
- Female threaded connections for pressure supply.

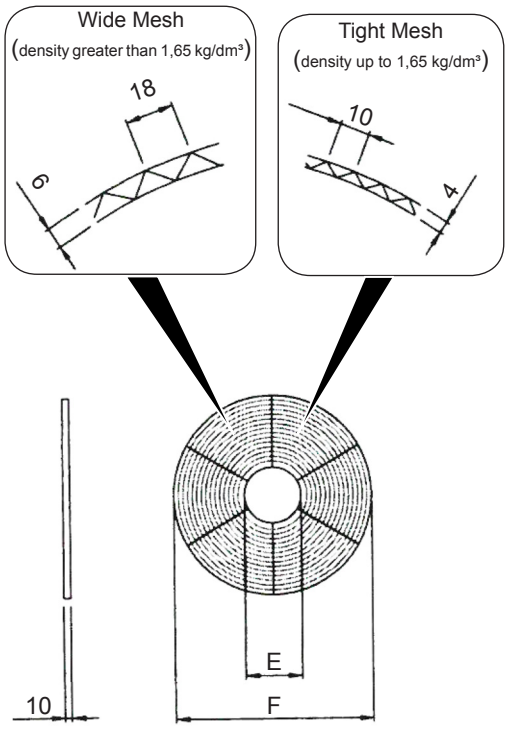

REINFORCED GRID

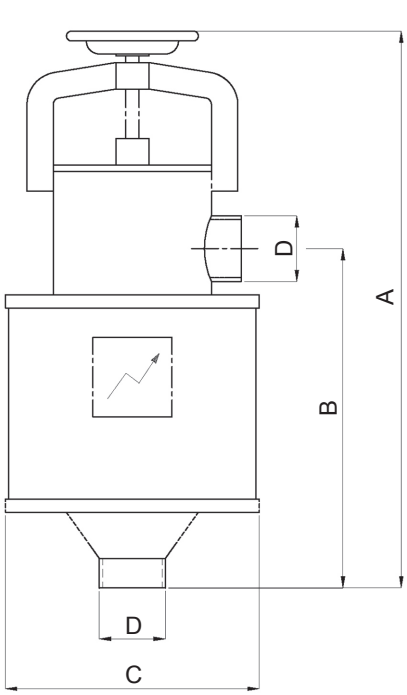

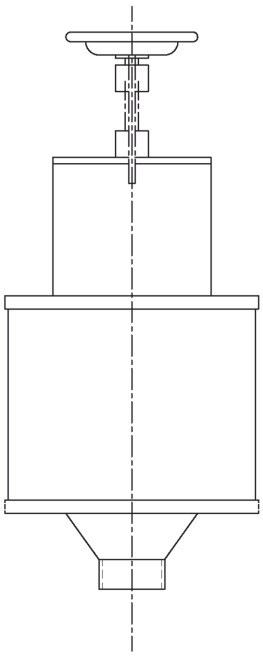

Mod./Size	A	B	øC	D	øE	øF	N° GRIDS
205	870	515	375	3”	86	203	26
245	965	600	520	4”	86	242	28

USE

- Plants for ceramic slips and glazes.

ADVANTAGES

- Increased magnetic power.
- Easy cleaning by disengaging the magnetic field.
- Extra thick grids.
- Longer filter area.

The information is approximate - The guaranteed values are released by Vibrotech s.r.l. on request-It is forbidden to reproduce the document even partially.

VIBROTECH S.r.l.
Registered Office: Via Racchetta, 2 - int. 20 - 41049 Sassuolo (MO)
Operational Headquarters: Via Don Pasquino Borghi, 4 - 42013 S. ANTONINO DI CASALGRANDE (RE) - Italy
Tel. +39 0536 82.37.76 - Fax +39 0536 81.20.09 - www.vibrotech.biz - email: info@vibrotech.biz
R.E.A. of Mo no. 407988 - Tax Code and VAT no. 03674210368

VIBROTECH™