# SOURCE TYPE ELECTROMAGNETIC IRON SEPARATOR FOR LIQUIDS


# FS 205


| TECHNICAL FEATURES | | |
|---|---|---|
| **DATA** | **U.M.** | **205** |
| Power | kW | 0.30 |
| Max. Capacity | dm³/h | 6,000 |
| Weight | N | 980 |
| Max liquid temperature | °C | 50 |





## STRUCTURAL FEATURES


- IP54 rating electric control panel.
- MAGNETIC STAINLESS STEEL reinforced grids.
- Electric coil powered with direct current.
- STAINLESS STEEL discharge hopper.

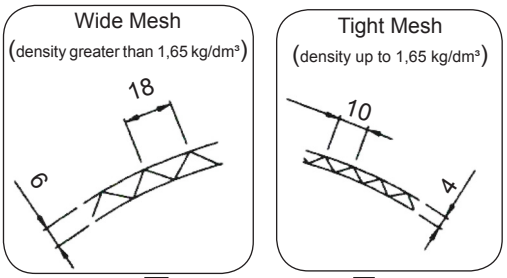

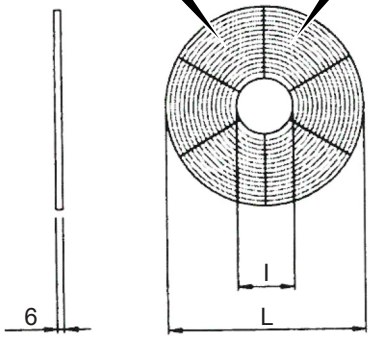
REINFORCED GRID

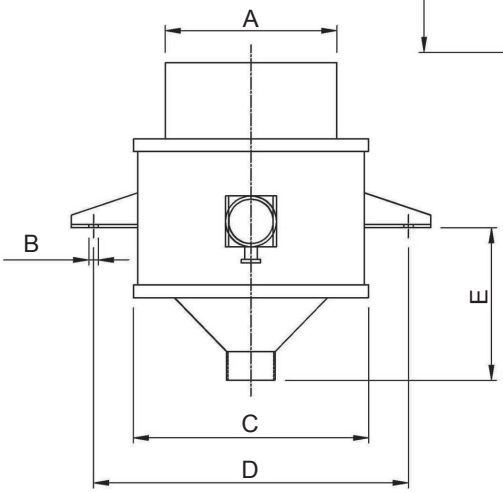


| Mod./Size | A | øB | øC | øD | E | F | G | H | øI | øL | N° GRIDS |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 205 | 270 | 12 | 375 | GIROFORI 465 | 225 | 465 | 345 | 3” | 86 | 203 | 29 |

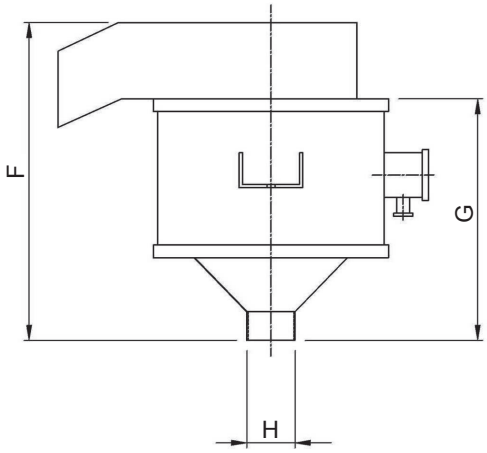**USE**
- Plants for ceramic slips and glazes.

**ADVANTAGES**
- Easy cleaning by disengaging the magnetic field.

The information is approximate - The guaranteed values are released by Vibrotech s.r.l. on request-It is forbidden to reproduce the document even partially.

VIBROTECH S.r.l.
Registered Office: Via Racchetta, 2 - int. 20 - 41049 Sassuolo (MO)
Operational Headquarters: Via Don Pasquino Borghi, 4 - 42013 S. ANTONINO DI CASALGRANDE (RE) - Italy
Tel. +39 0536 82.37.76 - Fax +39 0536 81.20.09 - www.vibrotech.biz - email: info@vibrotech.biz
R.E.A. of Mo no. 407988 - Tax Code and VAT no. 03674210368

VIBROTECH™